

## ENVIRONMENTAL PRODUCT DECLARATION

# BOLYU & AQUA MODULAR CARPET TILE

REMIX: NEXTERRA PET BACKING SYSTEM WITH RECLAIMED NYLON FACE FIBER



***Waste Not. Want Not. High style, performance, and sustainability. Intermix by BOLYU. Intermix features striking gradient pinstripes created using a proprietary style and performance. Shown with Svelte (solid, see Level EPD)***



### Mission:

Beaulieu Commercial's mission is to build a company of outstanding integrity that goes beyond traditional business values to reflect our shared beliefs about the value of healthy, happy and productive people. We believe in nurturing a healthy environment that will sustainably provide abundant resources, growth, wealth and equal opportunity to meet today's objectives and for future generations that will benefit from our environmental investments.

### Guiding Environmental Principles:

- Use materials, resources and processes that reduce or eliminate the risk of pollution and return waste to raw material use.
- Ensure continuous compliance with all environmental laws and regulations and measure progress on annual targets.
- Seek sustainable growth
- Make sustainability everyone's job
- Verify environmental marketing claims and make the information transparent
- Plan for generations
- Change the world, not just the copy



# ENVIRONMENTAL PRODUCT DECLARATION






Re-mix on Nexterra Backing  
 PET Backing System with Reclaimed Nylon Face Fiber

According to ISO 14025

This declaration is an environmental product declaration (EPD) in accordance with ISO 14025. EPDs rely on Life Cycle Assessment (LCA) to provide information on a number of environmental impacts of products over their life cycle. Exclusions: EPDs do not indicate that any environmental or social performance benchmarks are met, and there may be impacts that they do not encompass. LCAs do not typically address the site-specific environmental impacts of raw material extraction, nor are they meant to assess human health toxicity. EPDs can complement but cannot replace tools and certifications that are designed to address these impacts and/or set performance thresholds – e.g. Type 1 certifications, health assessments and declarations, environmental impact assessments, etc. Accuracy of Results: EPDs regularly rely on estimations of impacts, and the level of accuracy in estimation of effect differs for any particular product line and reported impact. Comparability: EPDs are not comparative assertions and are either not comparable or have limited comparability when they cover different life cycle stages, are based on different product category rules or are missing relevant environmental impacts. EPDs from different programs may not be comparable.



PROGRAM OPERATOR	UL Environment
DECLARATION HOLDER	Beaulieu Commercial
DECLARATION NUMBER	4786506985.101.1
DECLARED PRODUCT	Re-mix on Nexterra Backing
REFERENCE PCR	NSF PCR for Flooring (Carpet, Resilient, Laminate, Ceramic, and Wood)
DATE OF ISSUE	August 29, 2014
PERIOD OF VALIDITY	5 Years
CONTENTS OF THE DECLARATION	Product definition and information about building physics Information about basic material and the material's origin Description of the product's manufacture Indication of product processing Information about the in-use conditions Life cycle assessment results Testing results and verifications
The PCR review was conducted by:	NSF International
	Accepted by PCR Review Panel
	ncss@nsf.org
This declaration was independently verified in accordance with ISO 14025 by Underwriters Laboratories <input type="checkbox"/> INTERNAL <input checked="" type="checkbox"/> EXTERNAL	 Wade Stout, UL Environment EPM
	 Thomas Gloria, Life-Cycle Services, LLC
This life cycle assessment was independently verified in accordance with ISO 14044 and the reference PCR by:	 Thomas Gloria, Life-Cycle Services, LLC

# ENVIRONMENTAL PRODUCT DECLARATION



Re-mix on Nexterra Backing  
PET Backing System with Reclaimed Nylon Face Fiber

According to ISO 14025

## Product Definition

### Product Classification & Descriptions

Carpet tile with polyethylene terephthalate (PET) based backing chemistry and nylon face fiber. Re-mix products utilize close-loop Nylon 6 reclaimed face fiber. All products contain 100% post consumer recycled glass filler, 100% post consumer recycled PET polymer and 80+% pre-consumer and/or post-consumer recycled content primary and secondary backings. Non-reclaimed Nylon 6 face fiber may include up to 25% pre-consumer recycled fiber content.

Facilities that manufacture this product are located in the United States of America. Beaulieu Commercial Carpet is located at 201 Princeton Blvd. Adairsville, GA 30103.

### Range of Applications

Product is intended for use as a soft floor covering in medium to high traffic commercial applications

### Third-Party Certifications



NSF140 Platinum



# ENVIRONMENTAL PRODUCT DECLARATION



Re-mix on Nexterra Backing  
 PET Backing System with Reclaimed Nylon Face Fiber

According to ISO 14025

## Product Standards & Approvals

Test	Result
AATCC <sup>2</sup> Test Method 134-2011 Electrostatic Propensity	≥ 3.5 kV
AATCC <sup>2</sup> Test Method 16-2004 Colorfastness to Light	Minimum grade of 4 after 40 AFU
ASTM <sup>6</sup> E648 Standard Test Method for Critical Radiant Flux of Floor-Covering Systems	Class 1 (Avg CRF ≥ 0.45 watts/cm <sup>2</sup> )
ASTM <sup>6</sup> E662 Standard Test Method for Specific Optical Density of Smoke	Maximum Specific Optical Density ≤ 450
ASTM <sup>6</sup> D5252 Standard Practice for the Operation of the Hexapod Tumble Drum Tester	3.5
ASTM <sup>6</sup> D7330 Standard Test Method for Assessment of Surface Appearance Change	3.5
ISO <sup>14</sup> 2551/ASTM <sup>6</sup> D7570 Dimensional Stability (Modular Tiles Only)	Maximum + or - 0.027"

## Product Characteristics

Characteristic	Description	
Type of Manufacture	Carpet Tile	
Yarn Type	Nylon	
Additional characteristics according to NSF/ANSI 140	NSF140 Platinum	
VOC emissions test method	Green Label Plus, ID number 8595	
Characteristic	Nominal Value	Unit
Total thickness	.180 - .270	inch
Product weight	60 - 90	oz/yd <sup>2</sup>
Surface pile thickness	.085 - .128	Inch
Number of tufts or loops	12600 - 19100	Per ft <sup>2</sup>
Surface pile weight	16 - 24	oz/yd <sup>2</sup>
Pile fiber composition	100% Nylon	%
Secondary backing	100% PET	%



# ENVIRONMENTAL PRODUCT DECLARATION



Re-mix on Nexterra Backing  
 PET Backing System with Reclaimed Nylon Face Fiber

According to ISO 14025

## Material Content

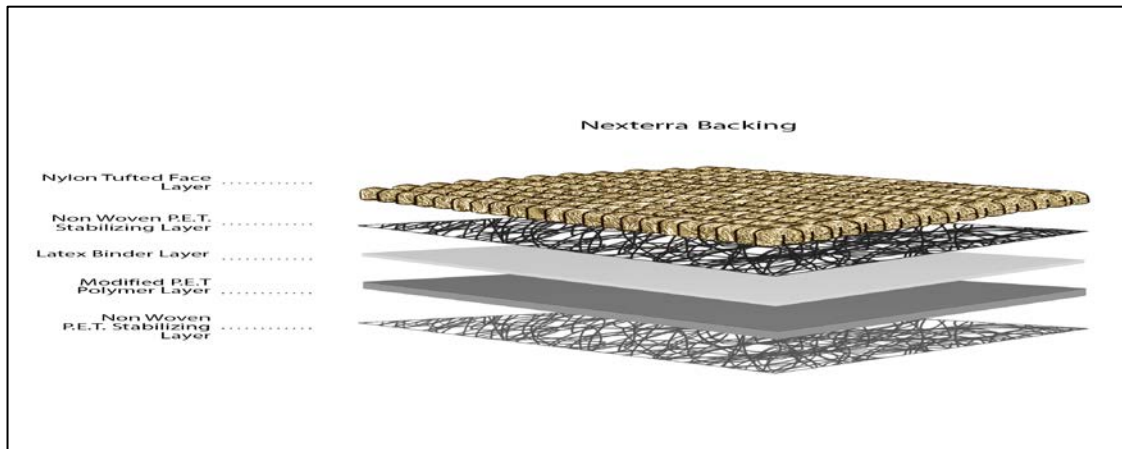


Figure 1: Diagram of Material Content

Product Layer	Material	Mass %	Availability	Recycled Content	Origin
Nylon Tufted Face Layer	Nylon 6	15%	Fossil Resource, limited	N6 option has 25% recycled content	US
Reclaimed Nylon Tufted Face Layer	Nylon 6 (reclaimed)	12%		100% Reclaimed	US
Non Woven Stabilizing Layer	PET	5%	Fossil resource, limited	80+% recycled content	US
Latex Binder Layer	SBR Latex	7%	Fossil resource, limited	No Recycled Content	US
Modified P.E.T. Polymer Layer	Main PET Polymer	19%	Fossil resource, limited	100% post-consumer recycled content	US
	Proprietary Copolymer	14%	Fossil resource, limited	No Recycled Content	US
	Glass Cullet Filler	22%	Mineral resource, abundant	100% post-consumer recycled content	US
Non Woven Stabilizing Layer	PET	6%	Fossil resource, limited	80+% recycled content	US



# ENVIRONMENTAL PRODUCT DECLARATION



Re-mix on Nexterra Backing  
PET Backing System with Reclaimed Nylon Face Fiber

According to ISO 14025

## Product Manufacturing

---

### Production of Main Materials

---

**Nylon 6:** Nylon 6 is synthesized by ring opening polymerization of caprolactam.

**Reclaimed Nylon 6:** Fiber reclaimed from internal manufacturing process.

**Polyethylene terephthalate (PET):** Polyethylene terephthalate is produced from ethylene glycol and dimethyl terephthalate or terephthalic acid.

**Styrene-butadiene Polymer (SBR):** Class of synthetic rubber that is derived from styrene and butadiene.

**Glass Cullet:** Finely ground recycled glass from Post-consumer sources such as bottles.

### Manufacture of Product

---

The manufacturing process involves the extrusion of nylon 6 fiber and the reclamation of nylon 6 fiber from internal industrial processes. The fiber is then tufted onto the primary backing. This tufted intermediary is then coated with backing materials using electrical and thermal energy and the materials listed above. The final coated product is then cut into carpet tiles and packaged for shipping to customer.

### Health, safety, and Environmental Aspects During Production

---

Beaulieu Commercial operates under the **BLAST** corporate safety program. **BLAST** is a customized, worker-driven process to systematically:

1. FOCUS - Identify the precautions (Blind Spots) critical to prevent accidents
2. INFLUENCE - Observe workers and provide positive feedback
3. LISTEN – Get insight into why risks occur
4. MEASURE – Develop a metric of these precautions and manage it proactively as leading indicators of accidents

**BLAST**-based safety encourages safe precautions and tries to understand and reduce risk, rather than waiting for an



# ENVIRONMENTAL PRODUCT DECLARATION



Re-mix on Nexterra Backing  
PET Backing System with Reclaimed Nylon Face Fiber

According to ISO 14025

accident to occur.

## Production Waste Management

---

Beaulieu Commercial strives to minimize waste throughout the manufacturing process. The majority of waste that is created is recycled through various means. Based on production weights, Beaulieu Commercial operates on a 2% waste to landfill percentage.

## Delivery and Installation

---

### Packaging

---

Prior to shipping, carpet tiles are protected in plastic bags and packaged in cardboard boxes that contain recycled content. Boxes are stacked and shipped on wooden pallets. The boxes are secured to the pallet with thin film plastic wrap (LLDPE). All materials are recyclable through local recycling options.

### Delivery

---

Bolyu & Aqua products are sold in both the domestic and international marketplace. Domestic shipments are typically completed by truck, whereas international shipments utilize ocean freight as well as truck. Average domestic shipment to project site, as modeled in LCA, is 577 miles. This value was calculated using a weighted average based on total square yards sent to customers in calendar year 2013.

### Installation

---

Installation should be accomplished through the use of Bolyu Pressure Sensitive Carpet Tile Adhesive. Detailed installation instructions are provided with all orders. Additionally, instructions can be downloaded from <http://www.bolyu.com/pdf/NexterraInstallationInstructions.pdf>

### Installation Waste

---

Packaging waste generated during the installation phase can be recycled with local recycling options.

### Health, Safety & Environmental Impacts During Installation

---

Adhesives used during installation meet the requirements of California South Coast Air Quality Management District Rule #1168 or are in accordance with the emissions requirements in California Department of Public Health Standard Method for the Testing and Evaluation of Volatile Organic Chemical Emissions from Indoor Sources Using Environmental Chambers, Version 1.1, February 2010 (also known as CA 01350 or may be referenced as FloorScore or Green Label Plus approved).



# ENVIRONMENTAL PRODUCT DECLARATION



Re-mix on Nexterra Backing  
PET Backing System with Reclaimed Nylon Face Fiber

According to ISO 14025

## Use Stage

### Reference Service Life of Floor Covering

The reference service life of Bolyu & Aqua products is 15 years. Flooring may be replaced sooner based on customer discretion.

### Cleaning and Maintenance

The LCA was modeled with the following Use Phase scenerios.

Cleaning Process	Frequency	Energy and Resources Used
Vacuum Cleaning	Daily	Electrical Energy
Interim Cleaning	Quarterly	Electrical Energy, Water
Deep Cleaning (extraction)	2 times / year	Electrical Energy, Water, cleaning

The above was based on a moderate use scenario. Additional details on the appropriate way to clean and maintain Bolyu & Aqua products can be viewed in the Bolyu Total Carpet Care Guide, available at [www.beaulieucommercial.com](http://www.beaulieucommercial.com)

### Structural Damage

Interior floor covering should not be installed until any and all structural damage has been adequately repaired and determined to be code compliant

## End-of-Life

### Recycling

REACT – Beaulieu Commercial’s Carpet Reclamation Program

Beaulieu Commercial partners with Carpet America Recovery Effort (CARE) to ensure that when our customer is ready to replace their carpeting we have a network of recyclers who are ready to step in and keep their carpet out of the landfill. By working through CARE’s network, we can easily locate nearby CARE certified recyclers. This allows us to not only be certain that we are using approved recyclers but also recyclers that are close to the jobsite. By using local recyclers we are able to help reduce the cost and carbon footprint of the recycle project. Transportation to recycling facilities is dependent on the CARE partner selected. In 2012, CARE’s network of recyclers diverted 351 million lbs of carpet. Your REACT contact at the mill is Shawn McGill -- office: 800 451 1250 x2635 email: [shawn.mcgill@beaulieugroup.com](mailto:shawn.mcgill@beaulieugroup.com)





# ENVIRONMENTAL PRODUCT DECLARATION



Re-mix on Nexterra Backing  
PET Backing System with Reclaimed Nylon Face Fiber

According to ISO 14025

## Disposal

Recycling of Bolyu & Aqua products is recommended. However, flooring can be disposed of in municipal landfills or sent to waste-to-energy facilities (subject to local regulations). Transportation to disposal facilities is dependent on the local availability of end-of-life options. To maintain a conservative LCA approach, end of life options included landfill disposal, waste-to-energy, and reclamation/recycling, as well as, transportation to each of these options. Rates of each option were based on research and reporting of the Carpet America Recovery Effort (CARE).

## Life Cycle Assessment Results

### General

A cradle-to-grave life cycle assessment (LCA) was conducted in accordance to the ISO14040/14044 series of standards. Additionally, external third parties critically reviewed the LCA study. The LCA assessed the sourcing and extraction, manufacturing, delivery and installation, use and end of life stages of the product's life cycle.

### Functional Unit

The functional unit is 1 square meter of flooring over one year of use.

### Cut-Off Criteria

Excluded materials met the following criteria:

- Less than 1% of total mass of the final product
- Less than 1% of total energy flows
- Total excluded materials must not exceed 5% of final product.

Materials that fell below the stated 1% threshold were also identified as not having disproportionately high environmental impacts.

### Allocation

Background data used in the LCA model may contain some allocation. Primary data based on production of Bolyu & Aqua products was not allocated.

### Background Data

The LCA was modeled using the GaBi 6 software platform. Background data was typically sourced from PE International datasets.

# ENVIRONMENTAL PRODUCT DECLARATION



Re-mix on Nexterra Backing  
PET Backing System with Reclaimed Nylon Face Fiber

According to ISO 14025

## Data Quality

---

**Time Related Coverage:** All gate-to-gate manufacturing data was sourced from Beaulieu Commercial records for calendar year 2013. The time coverage of background data is adopted from the specific datasets utilized in the model. Priority was given to the most up-to-date dataset available at the time the model was created. No background data is more than 10 years old.

**Geographical Coverage:** All gate-to-gate manufacturing data are specific to Beaulieu Commercial locations in Chatsworth, GA, Adairsville, GA and Bridgeport, AL. The data quality of background data is adopted through the use of the specific datasets utilized in the model. In general, domestic data was preferred, however the absence of US specific data required some international data to be utilized.

**Technology coverage:** Data utilized in the model represents manufacturing technology that is currently in use.

## System Boundaries

---

The LCA of 1 M<sup>2</sup> of Bolyu & Aqua products includes:

- **Sourcing/extraction stage:** Supply chain impacts to source raw materials, including transportation and packaging of these materials.
- **Manufacturing Stage:** Includes all gate-to-gate processes required to produce flooring from sourced raw materials.
- **Delivery and Installation Stage:** Includes packaging of finished flooring product, shipping of finished flooring product and the installation of flooring at the customer's project site.
- **Use Stage:** Includes cleaning and maintenance of flooring over time.
- **End of Life Stage:** Includes end of life options such as disposal in landfill, waste-to-energy and reclamation.

## Notes on Use Stage

---

Beaulieu Commercial has assumed a 15-year service life in the LCA model. However, the actual lifetime of the flooring is contingent on several factors, including changing style preference and building traffic. Results are presented for a single year of use, as well as for a 60-year reference service life of a building, as required by the Product Category Rules for Flooring. The 60-year building reference service life leads to four replacement periods of the installed flooring.

# ENVIRONMENTAL PRODUCT DECLARATION



Re-mix on Nexterra Backing  
 PET Backing System with Reclaimed Nylon Face Fiber

According to ISO 14025

## Life Cycle Inventory

The following table discloses primary energy, material resources, and waste flows for the 1-year study, as mandated by the product category rules for flooring. The results below are for a Re-mix product with 55% reclaimed face fiber.

Life Cycle Inventory						
<b>Primary Energy of non-renewable Resources</b>						
<b>Total Mega joules (MJ)</b>	151.55					
	Lignite	1%	Natural Gas	51%	Nuclear	5%
	Mineral Coal	9%	Oil	34%		
<b>Primary Energy of renewable Resources</b>						
<b>Total Mega joules (MJ)</b>	7.94					
	Hydropower	14%	Solar Power	30%		
	Wind Power	54%	Geothermic	2%		
<b>Secondary fuels specified (MJ)</b>						
<b>Total Mega joules (MJ)</b>	0					
<b>Non-renewable material sources (KG)</b>						
	6.37					
<b>Waste Flows (KG)</b>						
<b>Non-hazardous waste</b>	8.1					
<b>Hazardous waste</b>	0					



# ENVIRONMENTAL PRODUCT DECLARATION



Re-mix on Nexterra Backing  
 PET Backing System with Reclaimed Nylon Face Fiber

According to ISO 14025

## Life Cycle Impact Assessment

The following tables disclose life cycle environmental impacts for one year of product use, as well as, impacts over an assumed building lifetime of 60 years. The 60 year period includes four replacement cycles of flooring and 60 years worth of flooring maintenance. As required by the product category rules for flooring, total impacts are broken out across the five key life cycle stages. Results are presented in both CML2001 and TRACI 2.0 methodologies. The following results are for an average face fiber weight of 20 oz/yd<sup>2</sup> with 55% reclaimed yarn. Results for additional face fiber options are presented on the last page of this EPD.

**Table A: LCIA Results for 1-Year Study, Average Product with a Face Weight of 20 oz/sy and 55% reclaimed fiber content.**

CML 2001, (Nov 2010)							
Impact Category	Unit	Total	Sourcing & Extraction	Manufacturing	Delivery & Installation	Use	End-of-Life
Global Warming	kg CO <sub>2</sub> eq.	7.73	5.17	0.73	1.41	0.10	0.32
Acidification	kg SO <sub>2</sub> eq.	1.79E-02	9.82E-03	3.16E-03	2.56E-03	3.54E-04	2.04E-03
Ozone Depletion	kg R11 eq.	1.38E-08	1.66E-09	1.11E-08	4.72E-11	3.62E-11	9.33E-10
Smog	kg C <sub>2</sub> H <sub>4</sub> eq.	2.97E-03	1.46E-03	2.63E-04	4.38E-04	2.16E-05	7.88E-04
Eutrophication	kg PO <sub>4</sub> <sup>3-</sup> eq.	3.19E-03	1.52E-03	2.85E-04	4.13E-04	1.89E-05	9.55E-04
Abiotic Depletion	kg Sb eq.	8.44E-06	7.29E-06	3.72E-07	8.11E-07	1.38E-08	-4.57E-08

Traci 2.0							
Impact Category	Unit	Total	Sourcing & Extraction	Manufacturing	Delivery & Installation	Use	End-of-Life
Global Warming	kg CO <sub>2</sub> eq.	7.73	5.17	0.73	1.41	0.10	0.32
Acidification	kg SO <sub>2</sub> eq.	1.96E-02	1.06E-02	3.08E-03	2.88E-03	3.30E-04	2.68E-03
Ozone Depletion	kg CFC-11 eq.	1.66E-08	1.94E-09	1.35E-08	5.02E-11	3.85E-11	1.02E-09
Smog	kg O <sub>3</sub> eq.	3.39E-01	1.83E-01	3.48E-02	6.43E-02	2.82E-03	5.42E-02
Eutrophication	kg N eq.	1.10E-02	8.55E-03	2.88E-04	1.35E-03	1.62E-05	8.34E-04



# ENVIRONMENTAL PRODUCT DECLARATION



Re-mix on Nexterra Backing  
PET Backing System with Reclaimed Nylon Face Fiber

According to ISO 14025

**Table B: LCIA Results for 60-Year Study, Average Product with a Face Weight of 20 oz/sy and 55% reclaimed fiber content.**

CML 2001, (Nov 2010)							
Impact Category	Unit	Total	Sourcing & Extraction	Manufacturing	Delivery & Installation	Use	End-of-Life
Global Warming	kg CO <sub>2</sub> eq.	36.78	20.67	2.91	5.63	6.28	1.30
Acidification	kg SO <sub>2</sub> eq.	9.15E-02	3.93E-02	1.26E-02	1.03E-02	2.12E-02	8.14E-03
Ozone Depletion	kg R11 eq.	5.73E-08	6.66E-09	4.45E-08	1.89E-10	2.17E-09	3.73E-09
Smog	kg C <sub>2</sub> H <sub>4</sub> eq.	1.31E-02	5.85E-03	1.05E-03	1.75E-03	1.30E-03	3.15E-03
Eutrophication	kg PO <sub>4</sub> <sup>3-</sup> eq.	1.38E-02	6.06E-03	1.14E-03	1.65E-03	1.13E-03	3.82E-03
Abiotic Depletion	kg Sb eq.	3.45E-05	2.92E-05	1.49E-06	3.24E-06	8.29E-07	-1.83E-07

Traci 2.0							
Impact Category	Unit	Total	Sourcing & Extraction	Manufacturing	Delivery & Installation	Use	End-of-Life
Global Warming	kg CO <sub>2</sub> eq.	36.78	20.67	2.91	5.63	6.28	1.30
Acidification	kg SO <sub>2</sub> eq.	9.69E-02	4.25E-02	1.23E-02	1.15E-02	1.98E-02	1.07E-02
Ozone Depletion	kg CFC-11 eq.	6.84E-08	7.76E-09	5.41E-08	2.01E-10	2.31E-09	4.07E-09
Smog	kg O <sub>3</sub> eq.	1.51E+00	7.31E-01	1.39E-01	2.57E-01	1.69E-01	2.17E-01
Eutrophication	kg N eq.	4.51E-02	3.42E-02	1.15E-03	5.39E-03	9.74E-04	3.34E-03



# ENVIRONMENTAL PRODUCT DECLARATION



Re-mix on Nexterra Backing  
PET Backing System with Reclaimed Nylon Face Fiber

According to ISO 14025

## Interpretation

---

The vast majority of environmental impacts associated with Bolyu & Aqua products can be attributed to the supply chain. Virgin nylon is a significant contributor to the overall environmental profile of carpet products. As such, the utilization of reclaimed fiber is a highly effective strategy in reducing overall life cycle impacts.

High recycled content in backing materials also helps to reduce environmental impacts across all impacts categories.

In general, over the one-year period, use and maintenance contributes little (average of less than 2% across all impact categories), however use and maintenance becomes significant when one considers the full lifetime of a building, increasing to 20% of the total GHG footprint of the product over a 60 year period.

---

## Supplemental Materials

---

### Additional Environmental Information

---

**Elimination of Manufacturing Waste** - Beaulieu Commercial has a target to be landfill free by 2015.

**Water Harvesting** - At the company's Chatsworth Plant, Beaulieu Commercial harvests rainwater and grey water and utilizes the collection in the mixing of their latex compound. In 2013, over 130,000 gallons of water was collected and harvested.

**End of Life Reclamation** - Beaulieu Commercial is a Corporate Sustaining Partner of the Carpet America Recovery Effort (CARE).

**Green Energy** - Beaulieu Commercial has been an EPA Green Power Partner facility since January of 2008

**Community Development** - Beaulieu Commercial works with Georgia's Great Promise Partnership mentoring at-risk youths through student internship work programs.



# ENVIRONMENTAL PRODUCT DECLARATION



Re-mix on Nexterra Backing  
 PET Backing System with Reclaimed Nylon Face Fiber

According to ISO 14025

## Results for other Reclaimed Fiber Content Options

Table C: LCIA Results for 1-Year Study, Average Product with a Face Weight of 20 oz/sy and 45% reclaimed fiber content.

CML 2001, (Nov 2010)							
Impact Category	Unit	Total	Sourcing & Extraction	Manufacturing	Delivery & Installation	Use	End-of-Life
Global Warming	kg CO <sub>2</sub> eq.	8.15	5.58	0.73	1.41	0.10	0.32
Acidification	kg SO <sub>2</sub> eq.	1.88E-02	1.07E-02	3.16E-03	2.56E-03	3.54E-04	2.04E-03
Ozone Depletion	kg R11 eq.	1.38E-08	1.68E-09	1.11E-08	4.72E-11	3.62E-11	9.33E-10
Smog	kg C <sub>2</sub> H <sub>4</sub> eq.	3.08E-03	1.57E-03	2.63E-04	4.38E-04	2.16E-05	7.88E-04
Eutrophication	kg PO <sub>4</sub> <sup>3-</sup> eq.	3.32E-03	1.65E-03	2.85E-04	4.13E-04	1.89E-05	9.55E-04
Abiotic Depletion	kg Sb eq.	8.64E-06	7.49E-06	3.72E-07	8.11E-07	1.38E-08	-4.57E-08

Traci 2.0							
Impact Category	Unit	Total	Sourcing & Extraction	Manufacturing	Delivery & Installation	Use	End-of-Life
Global Warming	kg CO <sub>2</sub> eq.	8.15	5.58	0.73	1.41	0.10	0.32
Acidification	kg SO <sub>2</sub> eq.	2.06E-02	1.16E-02	3.08E-03	2.88E-03	3.30E-04	2.68E-03
Ozone Depletion	kg CFC-11 eq.	1.66E-08	1.96E-09	1.35E-08	5.02E-11	3.85E-11	1.02E-09
Smog	kg O <sub>3</sub> eq.	3.55E-01	1.99E-01	3.48E-02	6.43E-02	2.82E-03	5.42E-02
Eutrophication	kg N eq.	1.19E-02	9.41E-03	2.88E-04	1.35E-03	1.62E-05	8.34E-04



# ENVIRONMENTAL PRODUCT DECLARATION



Re-mix on Nexterra Backing  
 PET Backing System with Reclaimed Nylon Face Fiber

According to ISO 14025

**Table D: LCIA Results for 60-Year Study, Average Product with a Face Weight of 20 oz/sy and 45% reclaimed fiber content.**

CML 2001, (Nov 2010)							
Impact Category	Unit	Total	Sourcing & Extraction	Manufacturing	Delivery & Installation	Use	End-of-Life
Global Warming	kg CO <sub>2</sub> eq.	38.45	22.34	2.91	5.63	6.28	1.30
Acidification	kg SO <sub>2</sub> eq.	9.51E-02	4.29E-02	1.26E-02	1.03E-02	2.12E-02	8.14E-03
Ozone Depletion	kg R11 eq.	5.73E-08	6.74E-09	4.45E-08	1.89E-10	2.17E-09	3.73E-09
Smog	kg C <sub>2</sub> H <sub>4</sub> eq.	1.35E-02	6.27E-03	1.05E-03	1.75E-03	1.30E-03	3.15E-03
Eutrophication	kg PO <sub>4</sub> <sup>3-</sup> eq.	1.43E-02	6.58E-03	1.14E-03	1.65E-03	1.13E-03	3.82E-03
Abiotic Depletion	kg Sb eq.	3.53E-05	3.00E-05	1.49E-06	3.24E-06	8.29E-07	-1.83E-07

Traci 2.0							
Impact Category	Unit	Total	Sourcing & Extraction	Manufacturing	Delivery & Installation	Use	End-of-Life
Global Warming	kg CO <sub>2</sub> eq.	38.45	22.34	2.91	5.63	6.28	1.30
Acidification	kg SO <sub>2</sub> eq.	1.01E-01	4.66E-02	1.23E-02	1.15E-02	1.98E-02	1.07E-02
Ozone Depletion	kg CFC-11 eq.	6.85E-08	7.85E-09	5.41E-08	2.01E-10	2.31E-09	4.07E-09
Smog	kg O <sub>3</sub> eq.	1.58E+00	7.96E-01	1.39E-01	2.57E-01	1.69E-01	2.17E-01
Eutrophication	kg N eq.	4.85E-02	3.76E-02	1.15E-03	5.39E-03	9.74E-04	3.34E-03





# ENVIRONMENTAL PRODUCT DECLARATION



Re-mix on Nexterra Backing  
 PET Backing System with Reclaimed Nylon Face Fiber

According to ISO 14025

**Table E: LCIA Results for 1-Year Study, Average Product with a Face Weight of 20 oz/sy and 65% reclaimed fiber content.**

CML 2001, (Nov 2010)							
Impact Category	Unit	Total	Sourcing & Extraction	Manufacturing	Delivery & Installation	Use	End-of-Life
Global Warming	kg CO <sub>2</sub> eq.	7.31	4.75	0.73	1.41	0.10	0.32
Acidification	kg SO <sub>2</sub> eq.	1.70E-02	8.92E-03	3.16E-03	2.56E-03	3.54E-04	2.04E-03
Ozone Depletion	kg R11 eq.	1.38E-08	1.64E-09	1.11E-08	4.72E-11	3.62E-11	9.33E-10
Smog	kg C <sub>2</sub> H <sub>4</sub> eq.	2.87E-03	1.36E-03	2.63E-04	4.38E-04	2.16E-05	7.88E-04
Eutrophication	kg PO <sub>4</sub> <sup>3-</sup> eq.	3.06E-03	1.39E-03	2.85E-04	4.13E-04	1.89E-05	9.55E-04
Abiotic Depletion	kg Sb eq.	8.24E-06	7.09E-06	3.72E-07	8.11E-07	1.38E-08	-4.57E-08

Traci 2.0							
Impact Category	Unit	Total	Sourcing & Extraction	Manufacturing	Delivery & Installation	Use	End-of-Life
Global Warming	kg CO <sub>2</sub> eq.	7.31	4.75	0.73	1.41	0.10	0.32
Acidification	kg SO <sub>2</sub> eq.	1.86E-02	9.63E-03	3.08E-03	2.88E-03	3.30E-04	2.68E-03
Ozone Depletion	kg CFC-11 eq.	1.65E-08	1.92E-09	1.35E-08	5.02E-11	3.85E-11	1.02E-09
Smog	kg O <sub>3</sub> eq.	3.22E-01	1.66E-01	3.48E-02	6.43E-02	2.82E-03	5.42E-02
Eutrophication	kg N eq.	1.02E-02	7.69E-03	2.88E-04	1.35E-03	1.62E-05	8.34E-04



# ENVIRONMENTAL PRODUCT DECLARATION



Re-mix on Nexterra Backing  
 PET Backing System with Reclaimed Nylon Face Fiber

According to ISO 14025

**Table F: LCIA Results for 60-Year Study, Average Product with a Face Weight of 20 oz/sy and 65% reclaimed fiber content.**

CML 2001, (Nov 2010)							
Impact Category	Unit	Total	Sourcing & Extraction	Manufacturing	Delivery & Installation	Use	End-of-Life
Global Warming	kg CO <sub>2</sub> eq.	35.11	18.99	2.91	5.63	6.28	1.30
Acidification	kg SO <sub>2</sub> eq.	8.79E-02	3.57E-02	1.26E-02	1.03E-02	2.12E-02	8.14E-03
Ozone Depletion	kg R11 eq.	5.72E-08	6.58E-09	4.45E-08	1.89E-10	2.17E-09	3.73E-09
Smog	kg C <sub>2</sub> H <sub>4</sub> eq.	1.27E-02	5.44E-03	1.05E-03	1.75E-03	1.30E-03	3.15E-03
Eutrophication	kg PO <sub>4</sub> <sup>3-</sup> eq.	1.33E-02	5.55E-03	1.14E-03	1.65E-03	1.13E-03	3.82E-03
Abiotic Depletion	kg Sb eq.	3.37E-05	2.83E-05	1.49E-06	3.24E-06	8.29E-07	-1.83E-07

Traci 2.0							
Impact Category	Unit	Total	Sourcing & Extraction	Manufacturing	Delivery & Installation	Use	End-of-Life
Global Warming	kg CO <sub>2</sub> eq.	35.11	18.99	2.91	5.63	6.28	1.30
Acidification	kg SO <sub>2</sub> eq.	9.29E-02	3.85E-02	1.23E-02	1.15E-02	1.98E-02	1.07E-02
Ozone Depletion	kg CFC-11 eq.	6.84E-08	7.67E-09	5.41E-08	2.01E-10	2.31E-09	4.07E-09
Smog	kg O <sub>3</sub> eq.	1.45E+00	6.66E-01	1.39E-01	2.57E-01	1.69E-01	2.17E-01
Eutrophication	kg N eq.	4.16E-02	3.08E-02	1.15E-03	5.39E-03	9.74E-04	3.34E-03

